

## UpadIV

INDOOR SOLUTION  
SMD1515-16

- Lightweight and Easy Maintenance.
- Creative Display Possibilities.
- Transportation Protection.

### Easier, Modular Maintenance

---


The UpadIV is optimized for faster and easier tool free maintenance within 15 seconds, and 10 seconds for the power box! Its automatic lock design enables one engineer to install and take down walls.



### Creative Display Possibilities

---

Endless display possibilities: internal or external 90-degree corners, curved walls, ceiling, etc. High precision curving up to 5°(convex), 10° (concave).

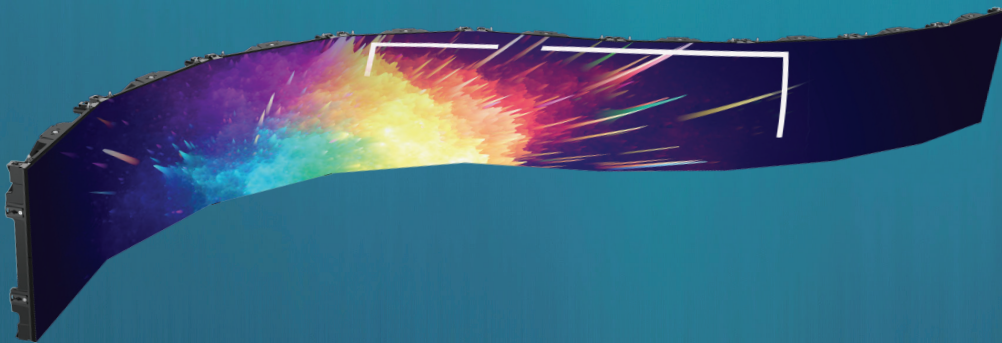

### Contact Us

844.263.3675 | [www.unilumin-usa.com](http://www.unilumin-usa.com)

Find Us @UniluminUSA






## Transportation Protection

High strength flight case, 12mm thick birch wood layer, high-strength casters.

Shockproof, anti-collision, offering the sturdiest protection.

Parameter	Value
Pixel Pitch	2.6mm
LED Type	3-in-1 Black SMD
Brightness	1,000 cd/m <sup>2</sup> (nits) calibrated
Pixels Per Panel	192 x 192 pixels
Pixel Density	147,456 pixels/m <sup>2</sup>
Weight Per Panel	6.3 kg (13.9 lbs)
Module Size	W250mm x H250mm / (9.8in x 9.8in)
Cabinet Size	W500mm x H500mm x D70.1mm / (19.7in x 19.7in x 2.8in)
Aspect Ratio	1:1
Material	Die-cast Magnesium
Ingress Protection	IP30
Curve	(Convex) -5°~+10°(Concave) (Optional)
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH
Storage Temperature/Humidity	-20°~ +55° / 10~80%RH
Maintenance	Rear
Horizontal / Vertical Viewing Angle	140° / 120°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	5000:1
Input Power (Max/Typical)	120W/40W per panel
Processing Depth	14 bit
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Mounting Configurations	Hung, Stacked
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.

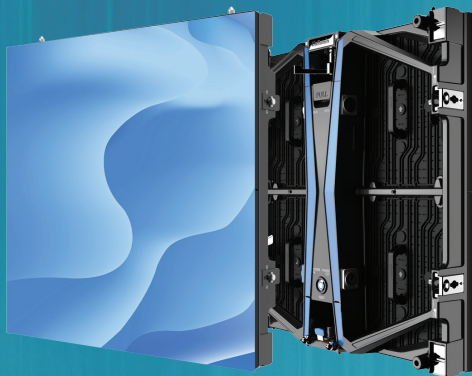

## UpadIV

### INDOOR SOLUTION

- Lightweight and Easy Maintenance.
- Creative Display Possibilities.
- Transportation Protection.

### Easier, Modular Maintenance

---

The UpadIV is optimized for faster and easier tool free maintenance within 15 seconds, and 10 seconds for the power box! Its automatic lock design enables one engineer to install and take down walls.



### Creative Display Possibilities

---

Endless display possibilities: internal or external 90-degree corners, curved walls, ceiling, etc. High precision curving up to 5°(convex), 10° (concave).



### Contact Us

844.263.3675 | [www.unilumin-usa.com](http://www.unilumin-usa.com)

Find Us @UniluminUSA





## Transportation Protection

High strength flight case, 12mm thick birch wood layer, high-strength casters.

Shockproof, anti-collision, offering the sturdiest protection.

Parameter	Value
Pixel Pitch	3.9mm
LED Type	3-in-1 Black SMD
Brightness	1000 cd/m <sup>2</sup> (nits) calibrated
Pixels Per Panel	128 x 128 pixels
Pixel Density	65,536 pixels/m <sup>2</sup>
Weight Per Panel	6.3 kg (13.9 lbs)
Module Size	W250mm x H250mm / (9.8in x 9.8in)
Cabinet Size	W500mm x H500mm x D70.1mm / (19.7in x 19.7in x 2.8in)
Aspect Ratio	1:1
Material	Die-cast Magnesium
Ingress Protection	IP30
Curve	(Convex) -5°~+10°(Concave) (Optional)
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH
Storage Temperature/Humidity	-20°~ +55° / 10~80%RH
Maintenance	Rear
Horizontal / Vertical Viewing Angle	140° / 120°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	3000:1
Input Power (Max/Typical)	120W/40W per panel
Processing Depth	16 bit
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Mounting Configurations	Hung, Stacked
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.