


USlimII 1.5

INDOOR SOLUTION

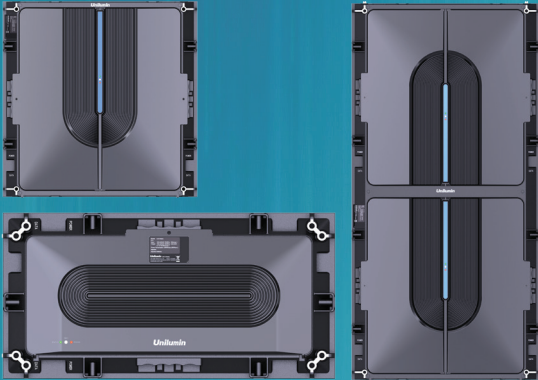

- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance.

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance



USlimII modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.




After opening the back cover, USlimII's modules, receiving cards and cables can be maintained from the rear.

Parameter	Value				
Pixel Pitch	1.56mm				
LED Type	3-in-1 SMD				
Brightness	800 cd/m ² (nits)				
Pixels Per Panel 4 sizes:	<table border="1"> <tr> <td>320 x 160px</td> <td>320 x 320px</td> </tr> <tr> <td>480 x 160px</td> <td>480 x 640px</td> </tr> </table>	320 x 160px	320 x 320px	480 x 160px	480 x 640px
320 x 160px	320 x 320px				
480 x 160px	480 x 640px				
Pixel Density	409,600 pixels/m ²				
Weight Per Panel 4 sizes:	<table border="1"> <tr> <td>3.2kg (7.1 lbs)</td> <td>5.6kg (12.3 lbs)</td> </tr> <tr> <td>8.8kg (19.4 lbs)</td> <td>10.5kg (23.1 lbs)</td> </tr> </table>	3.2kg (7.1 lbs)	5.6kg (12.3 lbs)	8.8kg (19.4 lbs)	10.5kg (23.1 lbs)
3.2kg (7.1 lbs)	5.6kg (12.3 lbs)				
8.8kg (19.4 lbs)	10.5kg (23.1 lbs)				
Module Size	W250mm x 250mm (9.8in x 9.8in)				
Panel Size (mm) 4 sizes:	<table border="1"> <tr> <td>500 × 250 × 39.6</td> <td>500 × 500 × 39.6</td> </tr> <tr> <td>750 × 250 × 39.6</td> <td>500 × 1000 × 39.6</td> </tr> </table>	500 × 250 × 39.6	500 × 500 × 39.6	750 × 250 × 39.6	500 × 1000 × 39.6
500 × 250 × 39.6	500 × 500 × 39.6				
750 × 250 × 39.6	500 × 1000 × 39.6				
Curve	0~+5° (Optional, standard is 0°)				
Material	Die-cast Aluminum				
Ingress Protection	IP50/IP10				
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH				
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH				
Maintenance	Front & Rear				
Horizontal / Vertical Viewing Angle	155° / 155°				
Color Temperature	2000-9300K Adjustable				
Brightness Control	Manual/Automatic				
Contrast Ratio	5000:1				
Input Power (Max/Typical)	480±10%W/m ² / 160±10%W/m ²				
Processing Depth	14bit				
Video Frame Rate	50/60 Hz				
Refresh Rate	3840 Hz				
Input Voltage	100~240VAC				
Input Power Frequency	50~60 Hz				
Mounting Configurations	Fixed, Floor-mounted, Hanging				
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape				

Specifications are for reference only and are subject to change without notice.

USlimII 1.8

INDOOR SOLUTION

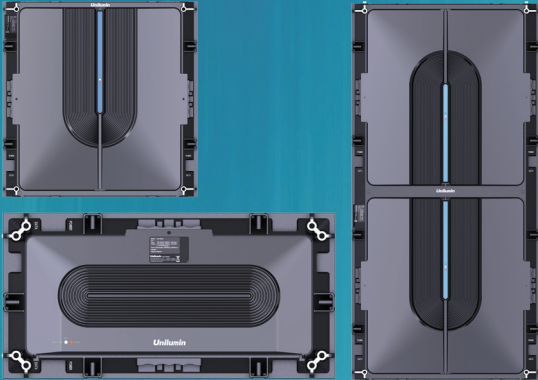

- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance.

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance



USlimII modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.




After opening the back cover, USlimII's modules, receiving cards and cables can be maintained from the rear.

Parameter	Value				
Pixel Pitch	1.85mm				
LED Type	3-in-1 SMD				
Brightness	800 cd/m ² (nits)				
Pixels Per Panel 4 sizes:	<table border="1"> <tr> <td>270 x 135px</td> <td>270 x 270px</td> </tr> <tr> <td>405 x 135px</td> <td>270 x 540px</td> </tr> </table>	270 x 135px	270 x 270px	405 x 135px	270 x 540px
270 x 135px	270 x 270px				
405 x 135px	270 x 540px				
Pixel Density	409,600 pixels/m ²				
Weight Per Panel 4 sizes:	<table border="1"> <tr> <td>3.2kg (7.1 lbs)</td> <td>5.6kg (12.3 lbs)</td> </tr> <tr> <td>8.8kg (19.4 lbs)</td> <td>10.5kg (23.1 lbs)</td> </tr> </table>	3.2kg (7.1 lbs)	5.6kg (12.3 lbs)	8.8kg (19.4 lbs)	10.5kg (23.1 lbs)
3.2kg (7.1 lbs)	5.6kg (12.3 lbs)				
8.8kg (19.4 lbs)	10.5kg (23.1 lbs)				
Module Size	W250mm x 250mm (9.8in x 9.8in)				
Panel Size (mm) 4 sizes:	<table border="1"> <tr> <td>500 × 250 × 39.6</td> <td>500 × 500 × 39.6</td> </tr> <tr> <td>750 × 250 × 39.6</td> <td>500 × 1000 × 39.6</td> </tr> </table>	500 × 250 × 39.6	500 × 500 × 39.6	750 × 250 × 39.6	500 × 1000 × 39.6
500 × 250 × 39.6	500 × 500 × 39.6				
750 × 250 × 39.6	500 × 1000 × 39.6				
Curve	0~+5° (Optional, standard is 0°)				
Material	Die-cast Aluminum				
Ingress Protection	IP50/IP10				
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH				
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH				
Maintenance	Front & Rear				
Horizontal / Vertical Viewing Angle	155° / 155°				
Color Temperature	2000-9300K Adjustable				
Brightness Control	Manual/Automatic				
Contrast Ratio	5000:1				
Input Power (Max/Typical)	420±10%W/m ² / 140±10%W/m ²				
Processing Depth	14bit				
Video Frame Rate	50/60 Hz				
Refresh Rate	3840 Hz				
Input Voltage	100~240VAC				
Input Power Frequency	50~60 Hz				
Mounting Configurations	Fixed, Floor-mounted, Hanging				
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape				

Specifications are for reference only and are subject to change without notice.

USlimII 2.5

INDOOR SOLUTION

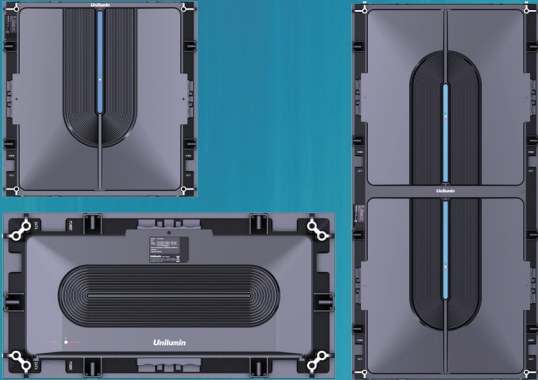

- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance.

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance



USlimII modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.




After opening the back cover, USlimII's modules, receiving cards and cables can be maintained from the rear.

Parameter	Value				
Pixel Pitch	2.5mm				
LED Type	3-in-1 SMD				
Brightness	1000 cd/m ² (nits)				
Pixels Per Panel 4 sizes:	<table border="1"> <tr> <td>200 x 100px</td> <td>200 x 200px</td> </tr> <tr> <td>300 x 100px</td> <td>200 x 400px</td> </tr> </table>	200 x 100px	200 x 200px	300 x 100px	200 x 400px
200 x 100px	200 x 200px				
300 x 100px	200 x 400px				
Pixel Density	409,600 pixels/m ²				
Weight Per Panel 4 sizes:	<table border="1"> <tr> <td>3.2kg (7.1 lbs)</td> <td>5.6kg (12.3 lbs)</td> </tr> <tr> <td>8.8kg (19.4 lbs)</td> <td>10.5kg (23.1 lbs)</td> </tr> </table>	3.2kg (7.1 lbs)	5.6kg (12.3 lbs)	8.8kg (19.4 lbs)	10.5kg (23.1 lbs)
3.2kg (7.1 lbs)	5.6kg (12.3 lbs)				
8.8kg (19.4 lbs)	10.5kg (23.1 lbs)				
Module Size	W250mm x 250mm (9.8in x 9.8in)				
Panel Size (mm) 4 sizes:	<table border="1"> <tr> <td>500 x 250 x 39.6</td> <td>500 x 500 x 39.6</td> </tr> <tr> <td>750 x 250 x 39.6</td> <td>500 x 1000 x 39.6</td> </tr> </table>	500 x 250 x 39.6	500 x 500 x 39.6	750 x 250 x 39.6	500 x 1000 x 39.6
500 x 250 x 39.6	500 x 500 x 39.6				
750 x 250 x 39.6	500 x 1000 x 39.6				
Curve	0~+5° (Optional, standard is 0°)				
Material	Die-cast Aluminum				
Ingress Protection	IP50/IP10				
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH				
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH				
Maintenance	Front & Rear				
Horizontal / Vertical Viewing Angle	155° / 155°				
Color Temperature	2000-9300K Adjustable				
Brightness Control	Manual/Automatic				
Contrast Ratio	5000:1				
Input Power (Max/Typical)	480±10%W/m ² / 160±10%W/m ²				
Processing Depth	14bit				
Video Frame Rate	50/60 Hz				
Refresh Rate	3840 Hz				
Input Voltage	100~240VAC				
Input Power Frequency	50~60 Hz				
Mounting Configurations	Fixed, Floor-mounted, Hanging				
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape				

Specifications are for reference only and are subject to change without notice.

USlimII 3.9

INDOOR SOLUTION

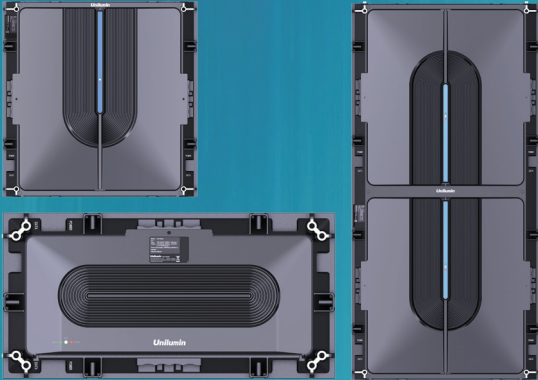

- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance.

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance



USlimII modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.



After opening the back cover, USlimII's modules, receiving cards and cables can be maintained from the rear.

Parameter	Value				
Pixel Pitch	3.9mm				
LED Type	3-in-1 SMD				
Brightness	900 cd/m ² (nits)				
Pixels Per Panel 4 sizes:	<table border="1"> <tr> <td>128 x 64px</td> <td>128 x 128px</td> </tr> <tr> <td>192 x 64px</td> <td>128 x 256px</td> </tr> </table>	128 x 64px	128 x 128px	192 x 64px	128 x 256px
128 x 64px	128 x 128px				
192 x 64px	128 x 256px				
Pixel Density	409,600 pixels/m ²				
Weight Per Panel 4 sizes:	<table border="1"> <tr> <td>3.2kg (7.1 lbs)</td> <td>5.6kg (12.3 lbs)</td> </tr> <tr> <td>8.8kg (19.4 lbs)</td> <td>10.5kg (23.1 lbs)</td> </tr> </table>	3.2kg (7.1 lbs)	5.6kg (12.3 lbs)	8.8kg (19.4 lbs)	10.5kg (23.1 lbs)
3.2kg (7.1 lbs)	5.6kg (12.3 lbs)				
8.8kg (19.4 lbs)	10.5kg (23.1 lbs)				
Module Size	W250mm x 250mm (9.8in x 9.8in)				
Panel Size (mm) 4 sizes:	<table border="1"> <tr> <td>500 × 250 x 39.6</td> <td>500 × 500 x 39.6</td> </tr> <tr> <td>750 × 250 x 39.6</td> <td>500 × 1000 x 39.6</td> </tr> </table>	500 × 250 x 39.6	500 × 500 x 39.6	750 × 250 x 39.6	500 × 1000 x 39.6
500 × 250 x 39.6	500 × 500 x 39.6				
750 × 250 x 39.6	500 × 1000 x 39.6				
Curve	0~+5° (Optional, standard is 0°)				
Material	Die-cast Aluminum				
Ingress Protection	IP50/IP10				
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH				
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH				
Maintenance	Front & Rear				
Horizontal / Vertical Viewing Angle	155° / 155°				
Color Temperature	2000-9300K Adjustable				
Brightness Control	Manual/Automatic				
Contrast Ratio	5000:1				
Input Power (Max/Typical)	480±10%W/m ² / 160±10%W/m ²				
Processing Depth	14bit				
Video Frame Rate	50/60 Hz				
Refresh Rate	3840 Hz				
Input Voltage	100~240VAC				
Input Power Frequency	50~60 Hz				
Mounting Configurations	Fixed, Floor-mounted, Hanging				
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape				

Specifications are for reference only and are subject to change without notice.